



BT – Face / Shell / Mill Adaptor

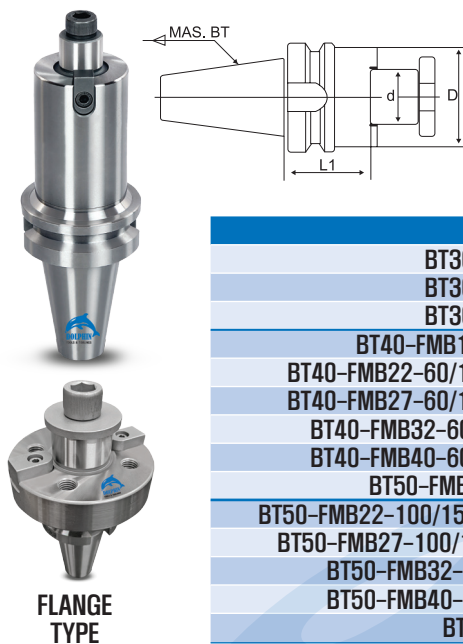

FMB-EXTENSION SPACER	L
22	50
22	100
27	50
27	100

MODEL	L1	D	d
BT30-FMB22-45	45	50	22
BT30-FMB27-45	45	60	27
BT30-FMB32-60	60	78	32
BT40-FMB16-60/100/150/200	60/100/150/200	34	16
BT40-FMB22-60/100/150/200/250/300/400	60/100/150/200/250/300/400	48	22
BT40-FMB27-60/100/150/200/250/300/400	60/100/150/200/250/300/400	54	27
BT40-FMB32-60/100/150/200/250/300	60/100/150/200/250/300	78	32
BT40-FMB40-60/100/150/200/250/300	60/100/150/200/250/300	89	40
BT50-FMB 16-100/150/200	100/150/200	34	16
BT50-FMB22-100/150/200/250/300/400/500/600	100/150/200/250/300/400/500/600	48/58	22
BT50-FMB27-100/150/200/ 250/300/400/500	100/150/200/250/300/400/500	60	27
BT50-FMB32-100/150/200/250/300	60/100/150/200/250/300	78	32
BT50-FMB40-100/150/200/250/300	100/150/200/250/300	98	40
BT50-FMB60	FLANGE Type		

BT – SDC Adaptor

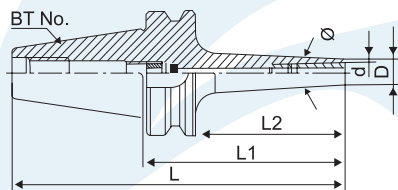

Model	L1	θ	D	d
BT40-SDC06-120/150	120/150	6°	14	3-6
BT40-SDC08-120/150	120/150	6°	22	3-8
BT40-SDC12-120/150	120/150	6°	34	3-12
BT50-SDC06-120/150	120/150	6°	14	3-6

SDC Cylindrical Adaptor



Model	D	L
C 16 – SDC 6 – 150 L	16	150
C 20 – SDC6 – 200 L	20	200
C 16 – SDC 8 – 150 L	16	150
C 20 – SDC 8– 200 L	20	200

BT Series Angle Heads (90°)

BT Power Milling Chucks

Accuracy 0.003mm



Model		MAX SPEED	MAX TORQUE	L	Power
BT30/BT40/BT50	ER 16	4500 RPM	12 NM	60/120	1.5 kw
BT30/BT40/BT50	ER 20	4000 RPM	16 NM	50/110	2 kw
BT30/BT40/BT50	ER 25	4000 RPM	32 NM	50/110	3 kw
BT30/BT40/BT50	ER 32	3500 RPM	40 NM	60/130	4 kw
BT30/BT40/BT50	ER 40	3000 RPM	75 NM	70/150	6 kw



Model	L	L1
BT30 C-20-90L	138	90
BT40 C-20-90L	155	90
BT40 C-32-100L	170	100
BT50 C-32-110L	206	110


BT Series SCA Adaptors (for Side and Face Cutter)

BT Series Hydrogrip Adaptor

Accuracy 0.003mm



Model	FOR BORE DIA
BT40 SCA 27	27 mm
BT40 SCA 32	32 mm
BT40 SCA 40	40 mm



Model	D1	D2	D3	L
BT 40 HYC 20-90	20	49	54	75